

AFN Decoder Reconfiguration/Re-Tuning Decoder PowerVu D9234 for Pacific Direct to Home



AFN HELP DESK

DSN: 312-348-1339

Civilian: 001-951-413-2339

[E-mail: sathelpdma@mail.mil](mailto:sathelpdma@mail.mil)

Assistance Available 24/7

Read all instructions before proceeding.

Considerations:

1. Verify these are the correct instructions for your decoder. Your decoder model number must match this document.
2. We suggest you print this document and use it in with the video we posted on how to safely realign your satellite dish. You should also look at the document that shows the minimum dish size and recommended dish size for your area. Generally speaking, a larger dish will reduce signal interruptions from rain.
3. If you still cannot get the signal after making these changes, call the AFN Help Desk.

ITEM NEEDED:

Remote control for your decoder

Remote Control - device used to control and make changes to the decoder.


With this decoder, you can use either of the remote controls pictured here.




Re-tuning your AFN Decoder

1.1 While the decoder is turned on, press the MENU button on the remote.


1.2 On the Main Menu, arrow up to **Receiver Status** and press SELECT on the remote control.

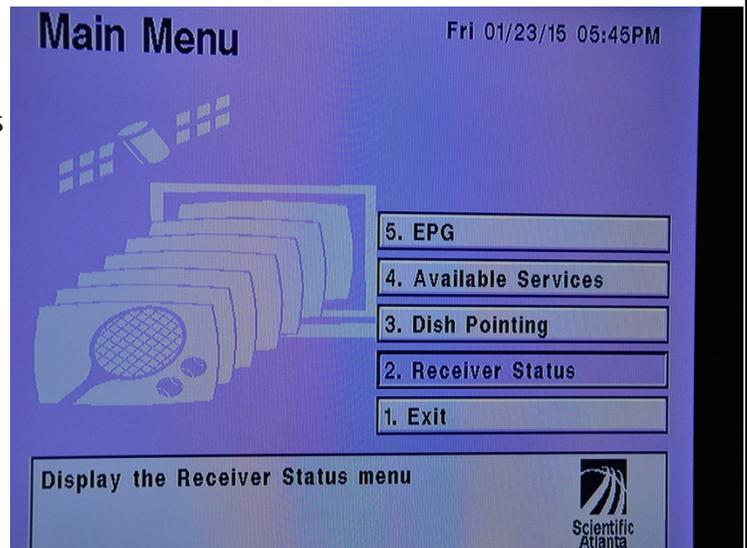

1.3 On the Receiver Status menu, arrow up to **Receiver Setup** and press SELECT on the remote control.

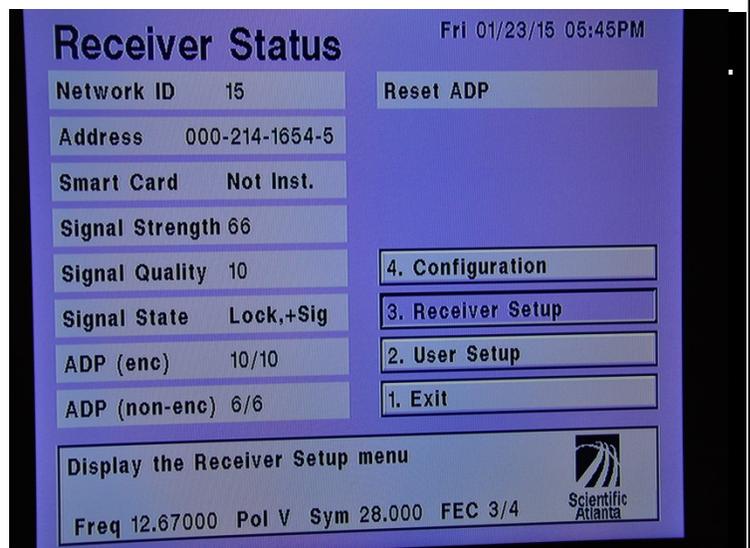


1.4 Once on the Receiver Setup screen, write down the current settings. This will help in the unlikely event the reconfiguration does not work.

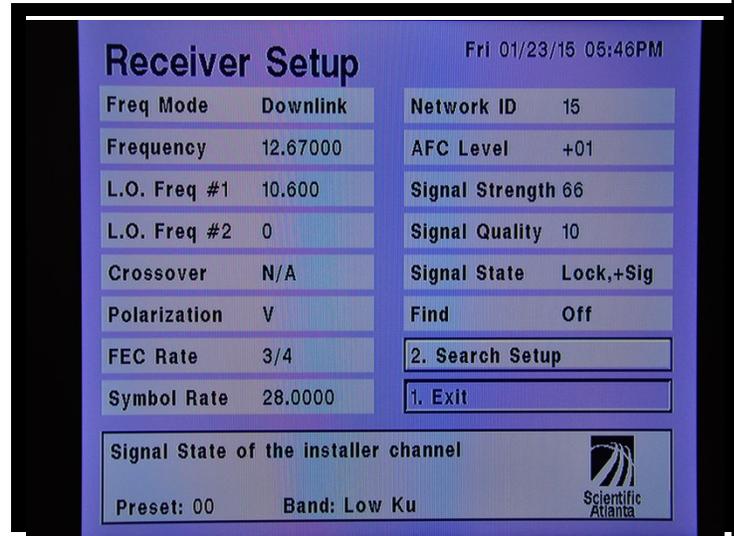

1.5 On the Receiver Setup screen, arrow up and to the left and highlight **Freq Mode**, and ensure it is set for **Downlink**.


1.5.1 If it is *not*, press SELECT on the remote control until **Downlink** is displayed.

1.5.2 Then press the down arrow to Continue.

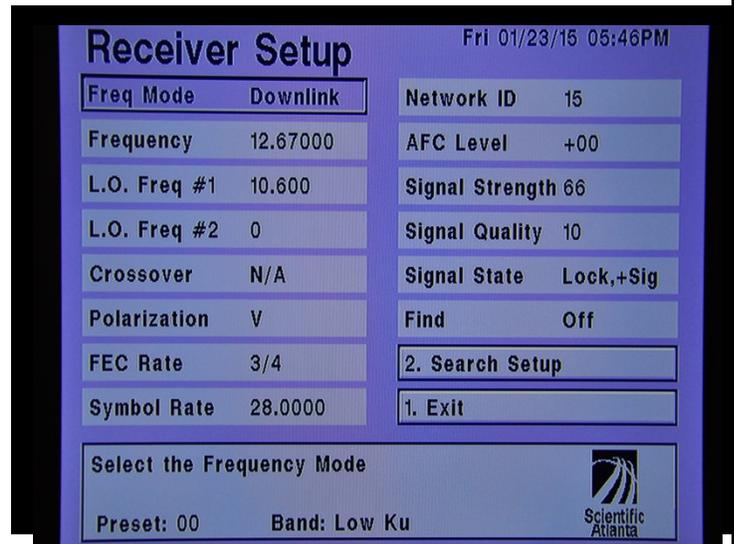


1.6 Arrow down to Frequency, press SELECT on the remote control, then using the number pad on the remote type in **12670000**.

1.6.1 The decimal point will automatically be added.

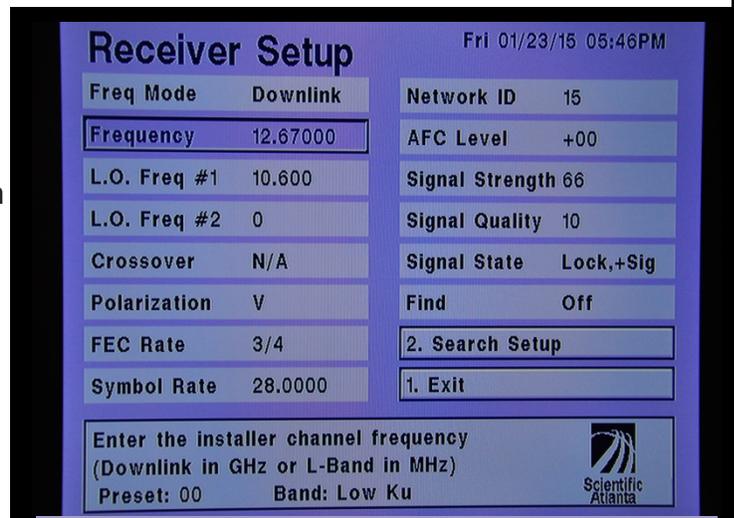


1.6 Arrow right to Network ID, press SELECT on the remote control, then using the number pad on the remote type in **15**.


1.6.1 Then press the down arrow to continue.

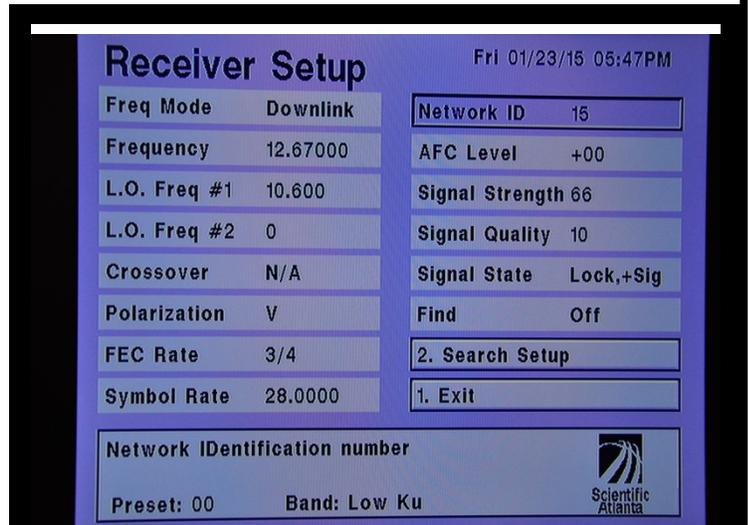

1.7 Arrow down to **Exit** and press SELECT on the remote control.

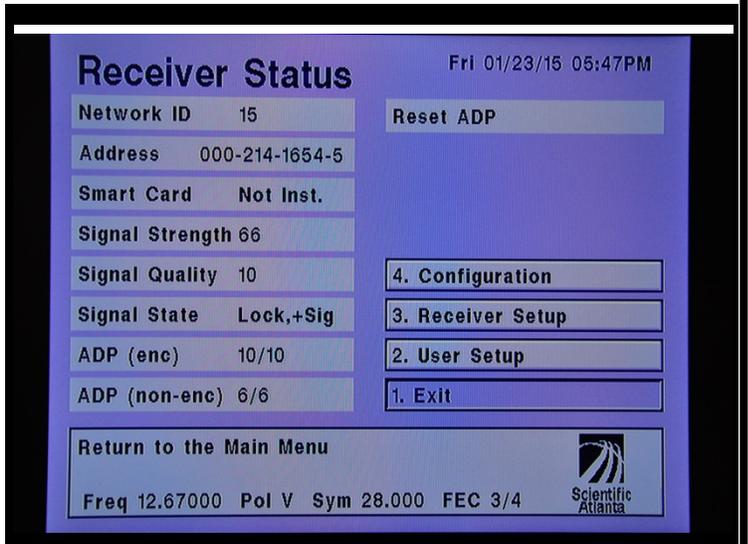

1.8 A popup window will appear, "**Save Settings?**", using the number pad on the remote type in "**1**"

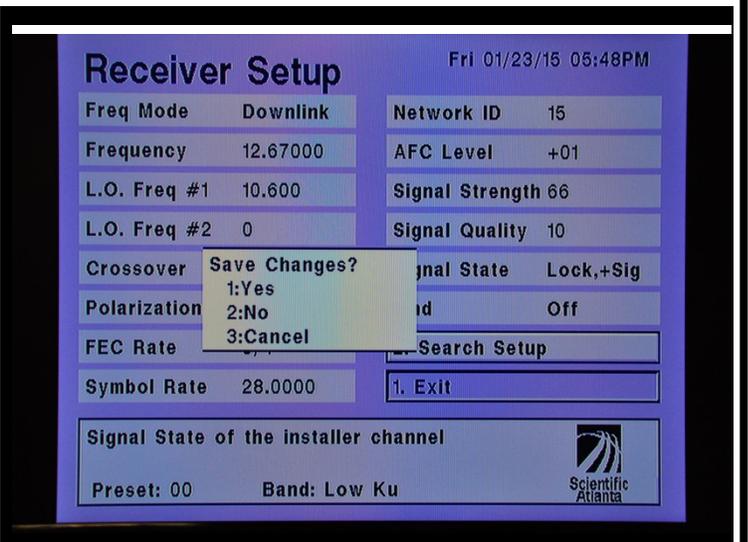


1.9 Another popup window will appear, "Please wait, Acquiring Network Information."

1.9.1 This may take several minutes.


1.9.2 The Receiver Status menu will be displayed next.



1.10 On the **Receiver Status** screen, arrow down to **Exit** and press SELECT on the remote control.

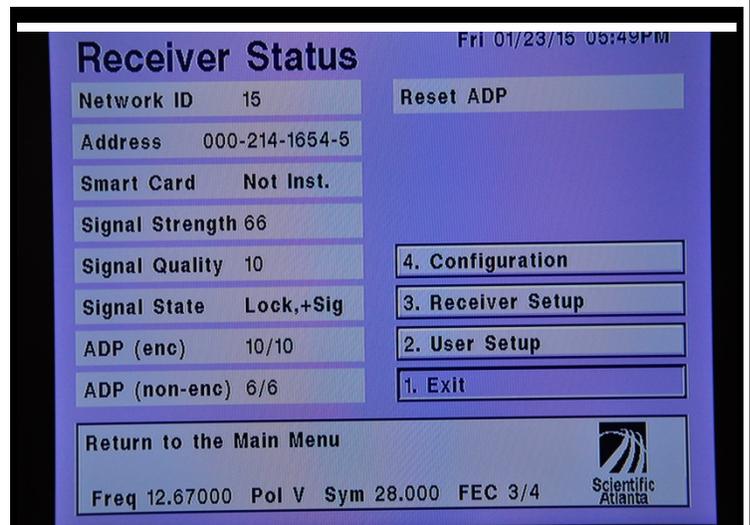

1.11 On the **Main Menu** screen, arrow down to **Exit** and press SELECT on the remote control.

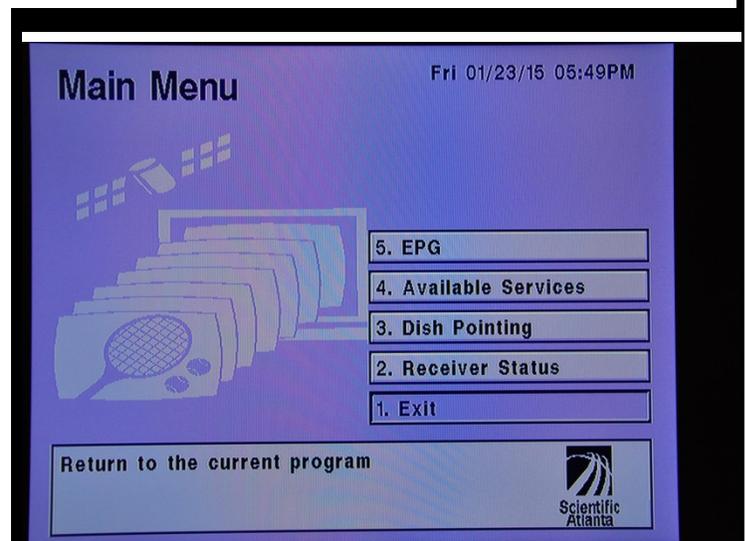

Congratulations! You have successfully completed the decoder re-tuning/reconfiguration



The image shows a television screen displaying a "Transformation Update" for AFN PowerNet. At the top, the logo "AFN PowerNet OPENLine" is visible. To the right, the date and time "May 18th 10:00am CET" are shown, along with the AFN logo and "powernet". Below this is a table of program updates:

1:32:33	1:30 PM	2:00 PM	2:30 PM
2 WLBT	Mid Day Mississippi	Days of Our Lives Alfonso	Kristian Alfonso
3 QVC	QVC Sampler (Shopping)	Cedar Canyon Fashion Anniversary (Special)	3rd
4 WAPT	All My Children	One Life to Live Alderson	Kristen Alderson

At the bottom of the screen, the website address "www.afneurope.net" is displayed.

/// END OF DOCUMENT ///