

AFN Decoder Reconfiguration/Re-Tuning Decoder PowerVu D9234 for Pacific DTH



AFN HELP DESK

DSN: 312-348-1339

Civilian: 001-951-413-2339

E-mail: sathelpdma@mail.mil

Assistance Available 24/7

Read all instructions before proceeding.

We suggest you print this document and use it with the video we posted on how to safely realign your satellite dish. You should also look at the document that shows the minimum dish size and recommended dish size for your area. Generally speaking, a larger dish will reduce signal interruptions from rain.

IMPORTANT: In addition to these decoder modifications, you **MUST** complete the dish alignment before you can receive AFN on Koreasat 5 (KSat 5).

Considerations:

1. Your decoder model must match this document: Verify these are the correct instructions for your decoder.
2. DO NOT modify any parameters in your decoder other than those explicitly instructed in this document. Other parameters displayed in these screenshots may be different than yours as satellite systems vary from customer to customer. The screenshots may not show lock and strength.
3. If you've already successfully acquired the KSat 5 AFN signal, this is a very simple procedure as you'll notice only "Downlink Frequency" and "Net ID" will be modified, and your screens will reflect successful acquisition.
4. If you have NOT aligned your dish yet, you will not receive the AFN signal. It is still necessary to complete the decoder configuration in this document, but your decoder will NOT show signal lock, and will FAIL acquisition. Proceed with the settings and save, as described below, and then complete the dish alignment.

If you still cannot get the signal after making the required decoder and satellite dish changes, call the AFN Help Desk.

Items needed:

Remote control for your decoder

Remote Control - device used to control and make changes to the decoder.


With this decoder, you can use either of the remote controls pictured here.




Re-Tuning your AFN Decoder

1.1 While the decoder is turned on, press the MENU button on the remote.


1.2 On the Main Menu, arrow up to **Receiver Status** and press SELECT on the remote control.

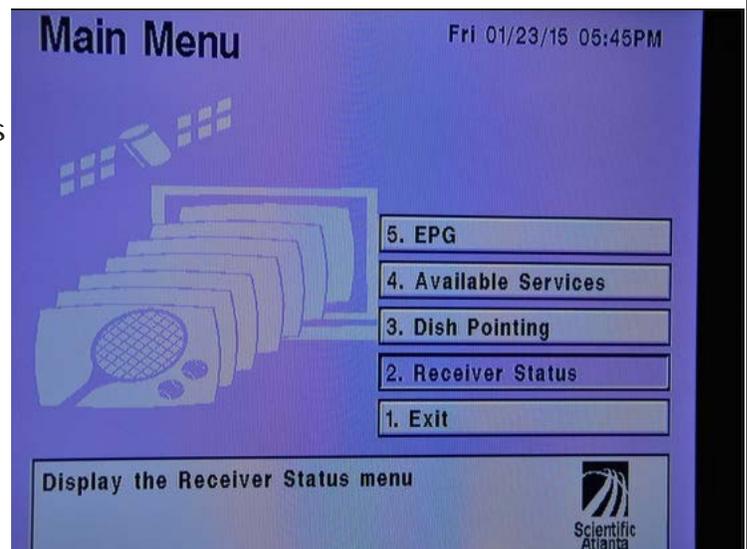

1.3 On the Receiver Status menu, arrow up to **Receiver Setup** and press SELECT on the remote control.

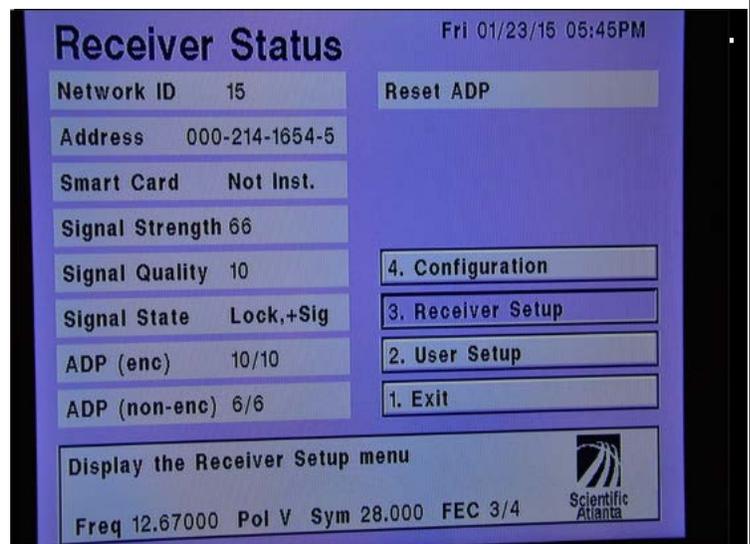


1.4 Once on the Receiver Setup screen, write down the current settings. This will help in the unlikely event the reconfiguration does not work.

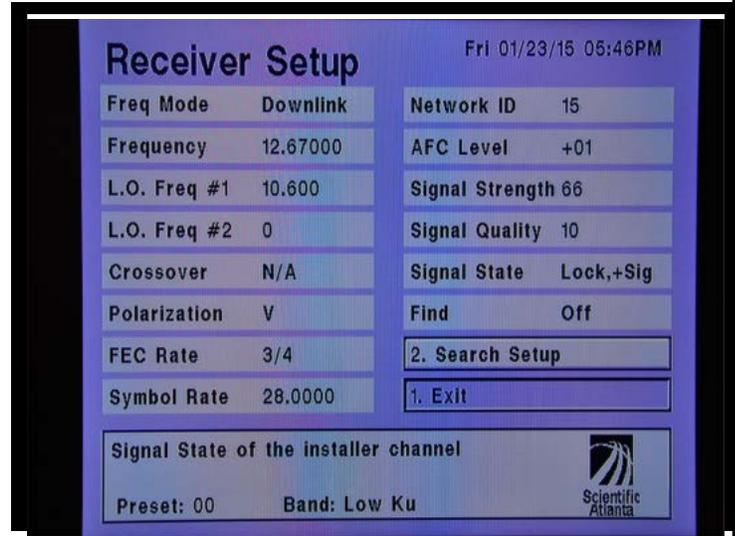

1.5 On the Receiver Setup screen, arrow up and to the left and highlight **Freq Mode**, and ensure it is set for **Downlink**.

1.5.1 If it is **not**, press SELECT on the remote control until **Downlink** is displayed.


1.5.2 Then press the down arrow to continue

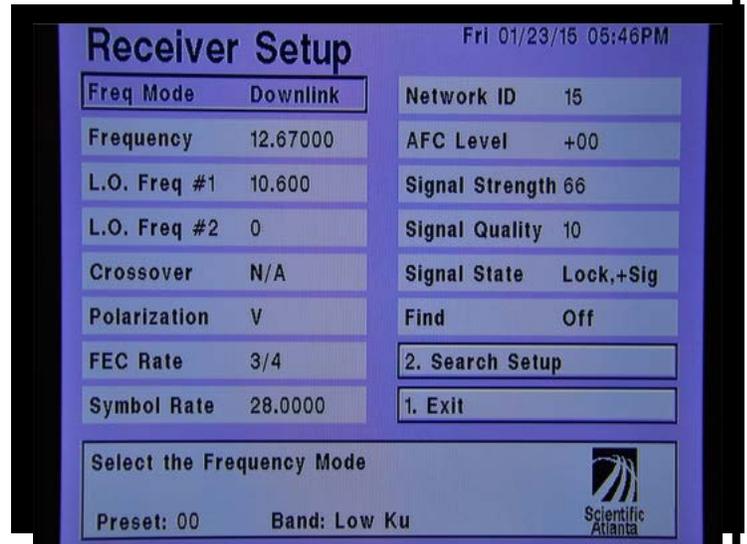

1.6 Arrow down to Frequency, press SELECT on the remote control, then using the number pad on the remote type in **1259000**


1.6.1 The decimal point will be added Automatically

1.7 Arrow to **Polar**, and select **V** from the dropdown menu. Press OK on the remote control.

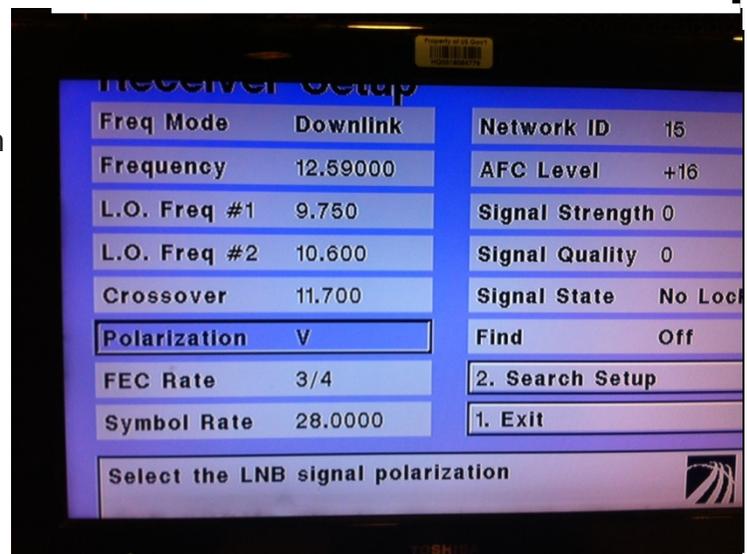


1.8 Arrow right to Network ID, press SELECT on the remote control, then using the number pad on the remote type in **00018**


1.8.1 Then press the down arrow to continue.

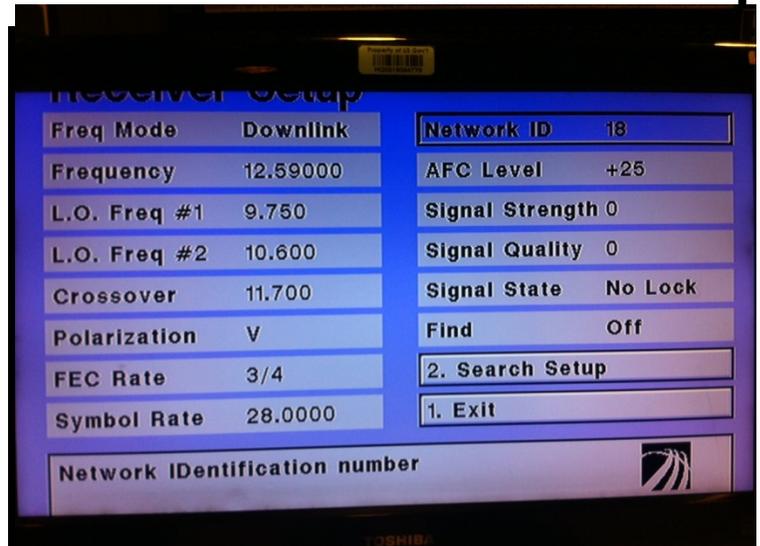

1.9 Arrow down to **Exit** and press SELECT on the remote control.

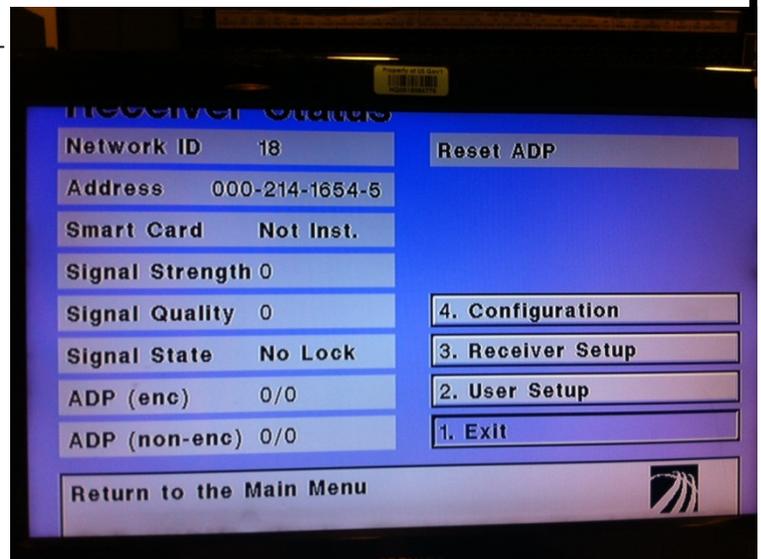


1.10 A popup window will appear, "**Save Settings?**", using the number pad on the remote type in **1**

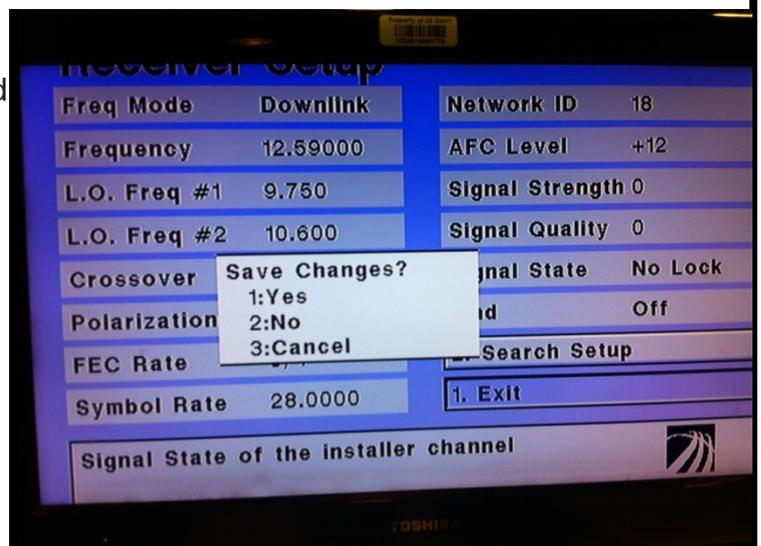

1.11 Another popup window will appear, "Please wait, Acquiring Network Information"

1.11.1 This may take several minutes


1.11.2 The Receiver Status menu will be displayed next

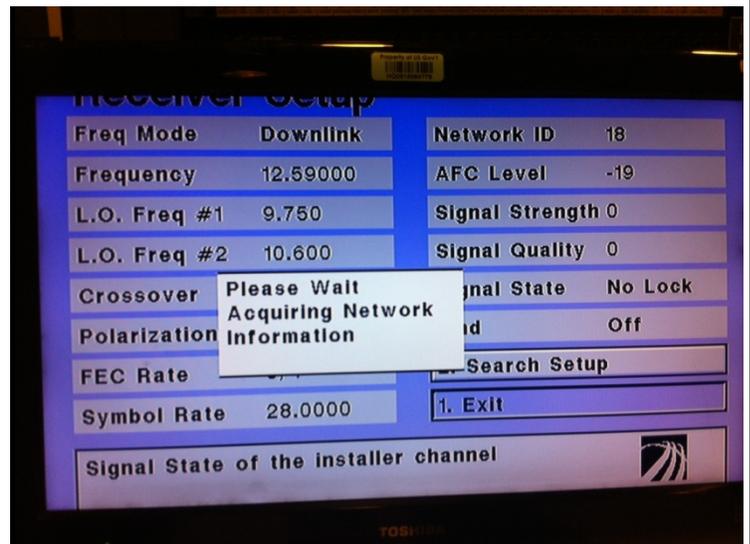

1.10 On the **Receiver Status** screen, arrow down to **Exit** and press SELECT on the remote control



1.11 On the **Main Menu** screen, arrow down to **Exit** and press SELECT on the remote control.

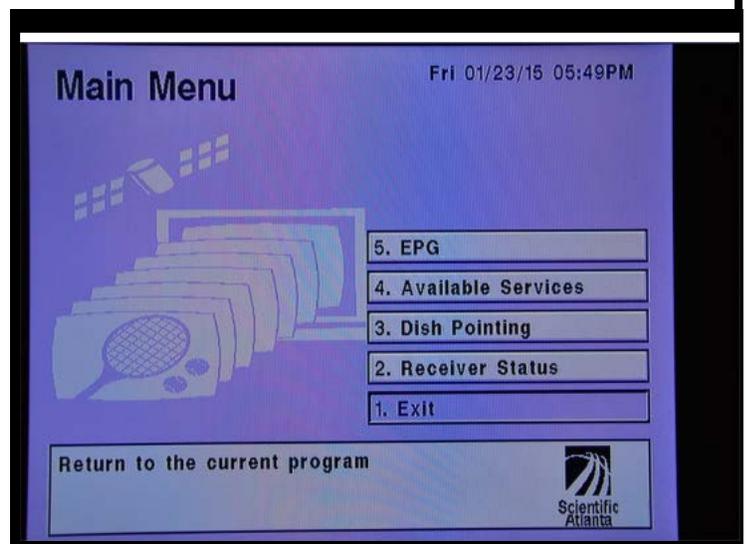

Congratulations! You have successfully completed the decoder re-tuning/reconfiguration

AFN PowerNet OPENline
May 18th
10:00am CET
AFN | powernet

Transformation Update

1:32:33	1:30 PM	2:00 PM	2:30 PM
2 WLBT	Mid Day Mississippi ☐	Days of Our Lives Kristian Alfonso ☐	
3 QVC	QVC Sampler (Shopping) ☐	Cedar Canyon Fashion 3rd Anniversary (Special)	
4 WAPT	All My Children ☐	One Life to Live Kristen Alderson ☐	

www.afneurope.net